
SITE WEATHER · CENTRAL KAMPALA

Friday 13 November

Hour-by-hour: what can go ahead on site · issued 21:18

RAIN	STORM RISK	HEAT (WBGT, SUN)	BEST POUR
1 mm	**low**	**24.4 °C**	**07-12 h**
chance up to 57%	keep an eye on the sky	continuous work OK	longest clear concrete window

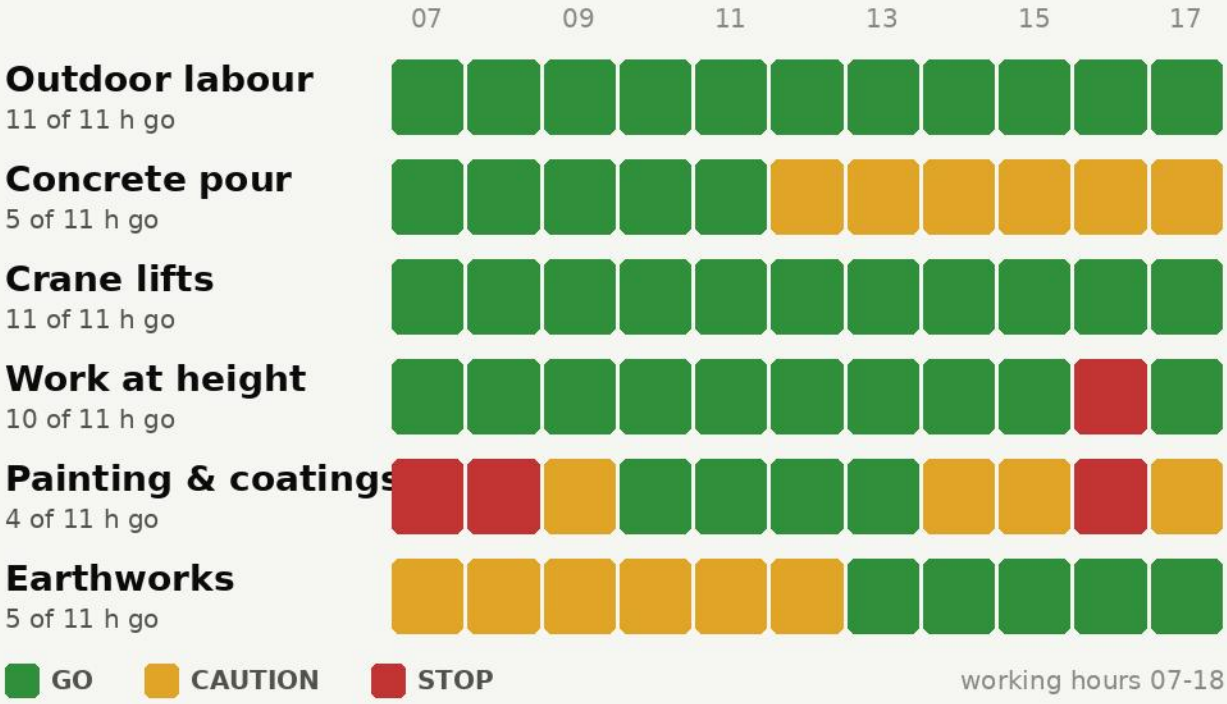

ON SITE TODAY

- Pour concrete 07-12 h; have curing cover ready.
- Ground is wet from recent rain: protect formation and stockpiles.

Screening guidance from a forecast. Your contract, crane limits and site H&S plan come first.

gavacharles.github.io/kampala-heat-atlas/site-weather/central-kampala

Gava Charles · Kampala Heat Atlas · forecast data Open-Meteo

SITE WEATHER · CENTRAL KAMPALA

The week on site

Workable hours per trade, 13 Nov to 18 Nov

	Fri 13	Sat 14	Sun 15	Mon 16	Tue 17	Wed 18
Outdoor labour	11h	11h	11h	11h	11h	11h
Concrete pour	5h	2h	0h	0h	0h	0h
Crane lifts	11h	5h	5h	2h	3h	4h
Work at height	10h	5h	2h	0h	3h	1h
Painting & coatings	4h	0h	0h	0h	0h	0h
Earthworks	5h	9h	0h	4h	9h	0h
Rain	1 mm 57%	2 mm 92%	10 mm 93%	4 mm 91%	2 mm 79%	9 mm 66%
Storm risk	low	likely	likely	possible	possible	possible

2/3 of hours or more · 1/3 to 2/3 · under 1/3

Numbers are go hours in the 11-hour working day (07-18 h).

Screening guidance from a forecast. Your contract, crane limits and site H&S plan come first.

gavacharles.github.io/kampala-heat-atlas/site-weather/central-kampala

Gava Charles · Kampala Heat Atlas · forecast data Open-Meteo

SITE WEATHER · CENTRAL KAMPALA

How to read the card

A daily weather check for contractors and site managers

Each row is a trade

Outdoor labour, concrete, cranes, work at height, painting, earthworks.

Each block is an hour

From 07:00 to 18:00. Green: go. Amber: go with care. Red: stop or reschedule.

Heat uses WBGT

Wet-bulb globe temperature, the standard for heat stress at work. It sets work/rest cycles.

Concrete looks at rain and drying

Rain in the next hours, and evaporation fast enough to crack fresh concrete (ACI 305).

Cranes use gusts at hook height

Gusts scaled to 30 m, against typical tower-crane limits, plus thunderstorm risk.

Painting needs dry air

Surface 3 °C above dew point and humidity under 85 % (ISO 8502-4).

Every day is kept on record

Month by month against the 1991-2020 climate, for programme reviews and delay claims.

Screening guidance from a forecast. Your contract, crane limits and site H&S plan come first.

gavacharles.github.io/kampala-heat-atlas/site-weather/central-kampala

Gava Charles · Kampala Heat Atlas · forecast data Open-Meteo