
SITE WEATHER · CENTRAL KAMPALA

# Friday 13 November

Hour-by-hour: what can go ahead on site · issued 21:18

| RAIN | STORM RISK | HEAT (WBGT, SUN) | BEST POUR |
|---|---|---|---|
| 1 mm | low | 24.4 °C | 07-12 h |
| chance up to 57% | keep an eye on the sky | continuous work OK | longest clear concrete window |

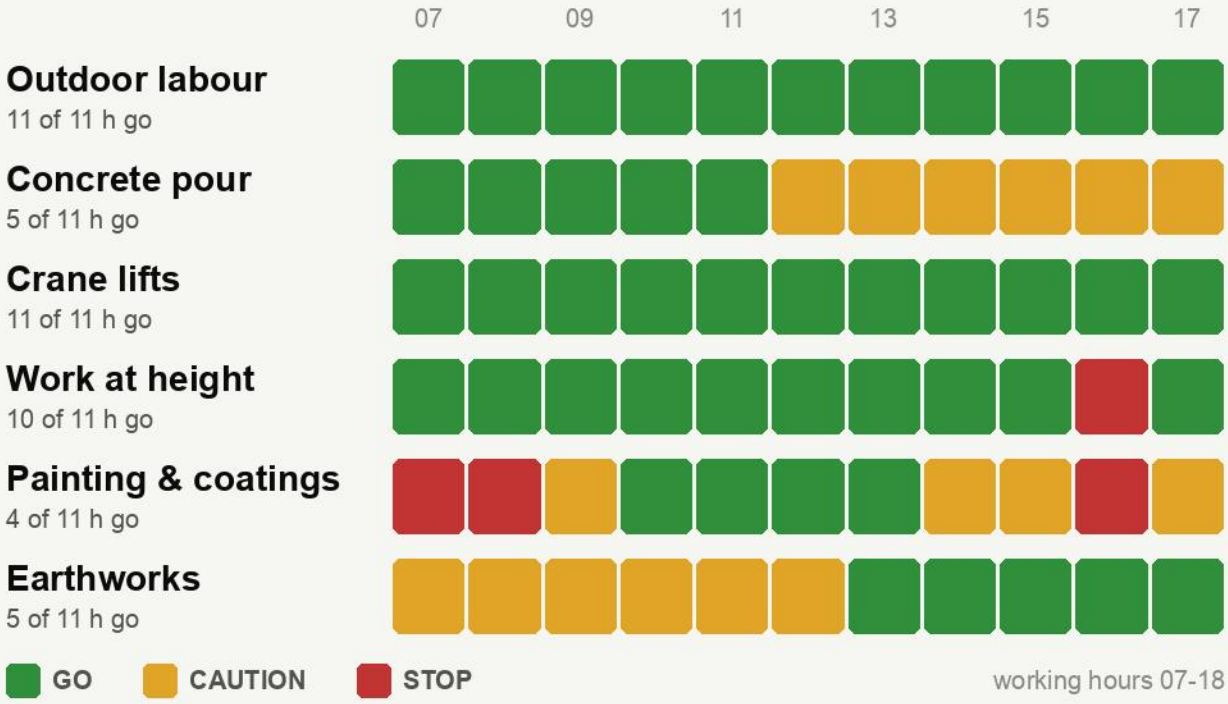


## ON SITE TODAY

- Pour concrete 07-12 h; have curing cover ready.
- Ground is wet from recent rain: protect formation and stockpiles.

Screening guidance from a forecast. Your contract, crane limits and site H&S plan come first.

**gavacharles.github.io/kampala-heat-atlas/site-weather/central-kampala**

Gava Charles · Kampala Heat Atlas · forecast data Open-Meteo

SITE WEATHER · CENTRAL KAMPALA

# The week on site

Hours each trade can go ahead, out of the 11-hour working day

| | Fri 13 | Sat 14 | Sun 15 | Mon 16 | Tue 17 | Wed 18 |
|---|---|---|---|---|---|---|
| **Outdoor labour** | 11h go | 11h go | 11h go | 11h go | 11h go | 11h go |
| **Concrete pour** | 5h go | 2h go | 0h go | 0h go | 0h go | 0h go |
| **Crane lifts** | 11h go | 5h go | 5h go | 2h go | 3h go | 4h go |
| **Work at height** | 10h go | 5h go | 2h go | 0h go | 3h go | 1h go |
| **Painting & coatings** | 4h go | 0h go | 0h go | 0h go | 0h go | 0h go |
| **Earthworks** | 5h go | 9h go | 0h go | 4h go | 9h go | 0h go |
| **Rain** | 1 mm 57% | 2 mm 92% | 10 mm 93% | 4 mm 91% | 2 mm 79% | 9 mm 66% |
| **Storm risk** | low | likely | likely | possible | possible | possible |

most of the day (8h+) · part of the day (4-7h) · little or none (0-3h)

Example: 3h = only 3 of the 11 hours (07-18 h) are clear of rain, storm, wind and heat limits for that trade.

Screening guidance from a forecast. Your contract, crane limits and site H&S plan come first.

**gavacharles.github.io/kampala-heat-atlas/site-weather/central-kampala**

Gava Charles · Kampala Heat Atlas · forecast data Open-Meteo

SITE WEATHER · CENTRAL KAMPALA

# How to read the card

A daily weather check for contractors and site managers

## Each row is a trade

Outdoor labour, concrete, cranes, work at height, painting, earthworks.

## Each block is an hour

From 07:00 to 18:00. Green: go. Amber: go with care. Red: stop or reschedule.

## Heat uses WBGT

Wet-bulb globe temperature, the standard for heat stress at work. It sets work/rest cycles.

## Concrete looks at rain and drying

Rain in the next hours, and evaporation fast enough to crack fresh concrete (ACI 305).

## Cranes use gusts at hook height

Gusts scaled to 30 m, against typical tower-crane limits, plus thunderstorm risk.

## Painting needs dry air

Surface 3 °C above dew point and humidity under 85 % (ISO 8502-4).

## Every day is kept on record

Month by month against the 1991-2020 climate, for programme reviews and delay claims.

Screening guidance from a forecast. Your contract, crane limits and site H&S plan come first.

**gavacharles.github.io/kampala-heat-atlas/site-weather/central-kampala**

Gava Charles · Kampala Heat Atlas · forecast data Open-Meteo